


## THREE SCREW PUMP

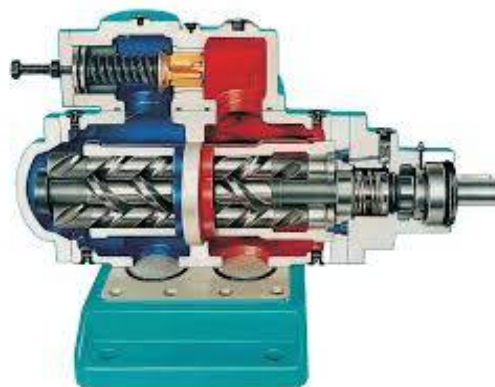

### Features: -

High Capacity and High Pressure

Working more than 5 mtr Negative suction

Low Noise & Vibration

Mounting type- Horizontal Foot, Horizontal Flanges, Vertical Flange Mounting , Vertical pedestal type, Submersible & etc.,

MOC-Cast Iron, Cast Steel, Fabricated Carbon Steel & etc.,

Sealing -Oil Seal, Gland Packing, Mechanical seal , Shaft Seal (Seal less)

Inlet & Outlet: Any form of inlet and outlet orientation



### Application: -

Machinery Lubrication  
Fuel Oil Transfer, Forwarding ,Firing application  
Lube Oil Transfer, Forwarding ,Blending application  
Hydraulic Elevators  
Powering Hydraulic machinery

### Operating Ranges

Capacity	10,000 LPM
Working Pressure	~ 320 bar
Working Temperature	+ 380 Degree
Pump Speed	~ 4000 RPM
Application	Lube Oil , LDO, HSD, Furnace Oil, Process Oils, Coolant Oils, Grease

### Industrial

Power Plants	Steel Plants	Cement Plants	Fertilizer Plants	Ship Building
Oil & Gas	Petroleum Refinery	Food Industries	Chemical Plants	Lube Oil Blending / Grease Making Plants
Rubber Industries	Paint Industries	Paper Mills	Bio-Diesel Industry	Polymer Industries



No.16 /29, Jani Basha Street , Royapettah, Chennai-600 014

Mobile No : 8608860007, 9941423185

sgcpumps@gmail.com

www.sgcpumps.com